FOR MORE THAN 35 YEARS WE'VE BEEN FINDING BETTER WAYS TO COMPRESS AIR & GAS



HIGH QUALITY

HIGH AIR







High Air Machinery Co,Ltd

- No.155, Tinghua RD, Shanghai, PRC 201505
- ☎ Phone:86-21-60892089
- ₽ Fax:86-21-60892120
- ⊗ sale@highair.co



ISO 9001:2000 Certificated







PERFORMING UNDER PRESSURE

High Air Machinery
PET-BULL SERIES
PET COMPRESSOR

30-45BAR 650PSI 2M³/min-10M³/min



/// HIGH AIR

HIGH AIR

Expert In High Pressure Gas System


Our PET compressor is using the most advanced energy-efficient technology, low cost and long service life, has already become an optimal solution for users.


MODEL W63

- ♥ 6 cylinders, 3 stages, UP TO 42 BAR
- ▼ Well balanced crankshaft and flywheel
- ♥ 3 stages design, less rod load, more reliability
- ▼ TIMKEN bearings From U.S
- ♥ High efficiency deep cooling fins
- ▼ External lubricant pump driven by independent motor
- 3rd stage injection lubricated

MODEL V


- ♥ Model VW32, 3 cylinders 2 stages, UP TO 30 BAR
- ♥ Model VW33, 3 cylinders 3 stages, UP TO 45 BAR
- ♥ Model VW43, 4 cylinders 3 stages, UP TO 45 BAR
- ▼ Model V52, 5 cylinders 2 stages, UP TO 30 BAR
- ♥ High efficiency deep cooling fins
- ♥ Internal lubricant pump driven by crankshaft





The Compressor Package

PB series integrate all components on one skid, no extra foundation required. Our one-stop solution bring the benefits

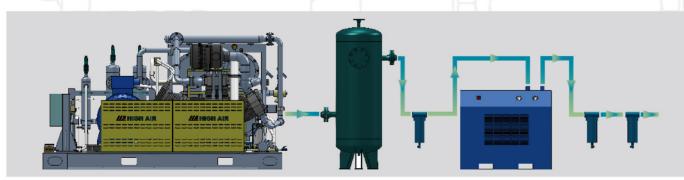

Pet Bull Compressor Range

The Low Cost Solution for the Small PET Compressor User

Dryer, filters and tank are integrated in Pet Bull Compressor, meet High Air quality requirements.

♥ High Efficiency, Energy Saving

Thanks for the High Efficient valve and new ring material, Pet Bull Compressor become more efficient and save energy cost.

▼ Low Service Cost

Long lasting valve and ring material extend Service life, reducing the maintenance cost.

▼ Low Power Requirement

Multi-Compressors system and soft starter require less in electric power supply, less impact on power grid.

Compact Design

High efficient coil tubes cooler makes Pet Bull Compressor more compact, less installation space required.

//A HIGH AIR

PET BULL RANGE

MODEL	CAPACITY M³/MIN	Maximum working Pressure BAR	Speed RPM	Motor Power KW	Dimension L x W x H MM	Weight KG	Cooling
PB2-40A	2.1	40	1250	30	1800*950*1300	1000	AIR
PB3-30A	3.3	30	920	37	1800*950*1300	1000	AIR
PB5-30A	5.4	-30	1100	55	2200*1200*1440	1250	AIR
PB4-40A	4.3	40	1300	55	2200*1200*1440	1450	AIR
PB-10W*	10	40	960	110	3700*2100*2060	5000	WATER

^{*}air-cooled version upon request

DV CEDIEC BOOCTED

PV SERIES	BOOSTER		1.11.11			
MODEL	Inlet Pressure Bar	Out Pressure Bar	Capacity m³/min	Power Kw	Size mm LXWXH	Weight KG
PV6-30	8	30	6	30	1800*950*1300	950
PV6-40	8	40	6	37	1800*950*1300	1000
PV8-30	8	30	8	37	1800*950*1300	1000
PV8-40	8	40	8	45	2200*1300*1500	1400
PV10-30	8	30	10	45	1800*950*1300	1050
PV10-40	8	40	10	55	2200*1300*1500	1450

^{*}air-cooled version upon request